TRAILER HITCH MOUNTING INSTRUCTIONS

CATALOG NUMBER 757235
APPLICATION ..... Isuzu Vehicross SUV, 1999-00

HITCH CAPACITY — Weight Carrying — 3500 Pounds Gross Trailer Weight
300 Pounds Maximum Tongue Weight
OR the maximum load specified by the vehicle manufacturer: WHICHEVER IS LESS

PLEASE NOTE:

A. This hitch will work with a ball mount sized for 2" square receivers. Before towing, the hitch pin and retainer clip MUST be in place securing ball mount to receiver. Do not use this receiver with a ball mount with a greater than 3 1/4" drop.

B. This product complies with safety specifications and requirements for connecting devices and towing systems of the state of New york and regulation V.E.S.C. V-5.

1. Under the rear of vehicle locate and remove tie down brackets on both left and right frame rails. Return to customer.

2. Lift hitch into position on bottom of frame rails (see diagram) and attach at center slotted holes in hitch side plates re-using existing screws from tie down brackets (1). Use flat and lock washers.

3. Drill bottom surface of frame rails (2) places/side for 7/16" diameter carriage bolts (2) using hitch as a template.

4. Using fish wire, pull carriage bolts and #1015 backing plates (2) into frame rails and into holes (2). Install balance of fasteners (2).

5. Final tighten all fasteners as specified on reverse of these instructions. Recheck occasionally for tightness.

FASTENERS:

(1) (2) Re-use existing 12mm screws with washers.

(2) (4) 7/16x 1 1/2" carriage bolt
(4) backing plate 1 1/4" sq. # 1015
(4) 7/16" flat washer
(4) 7/16" lock washer
(4) 7/16" hex nut

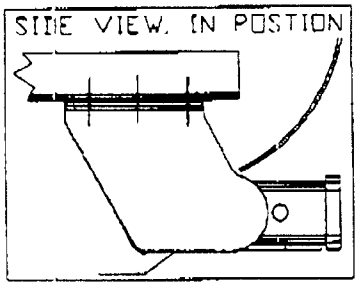

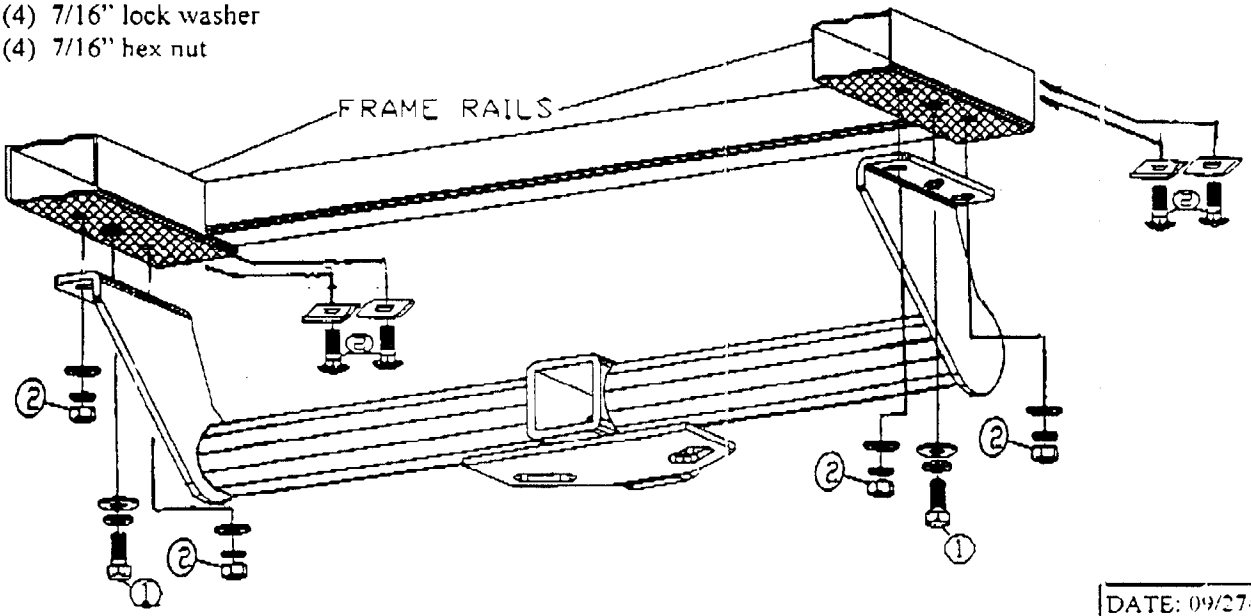

DATE: 09/27/00 (A)